

Installation instructions

Fastening the inserts use flat headed screws of size M3 / up to M3.5 max.


Tool size for BERKER products with combination cross-head screws as fixing screws:

- Cross-head bits, type: Pozidriv size 1.
- Cross-head screwdriver: type: Pozidriv size 1.
- Slotted screwdriver: type: blade thickness 0.8 mm.


Contact screws:

- Cross-head bits, type: Pozidriv size 2.
 - Cross-head screwdriver: type: Pozidriv size 2
 - Slotted screwdriver: type: blade thickness 1 mm
- When using cordless screwdrivers, e.g. Würth ABS 12-112, setting 1st speed, step 1 with 0.5 Nm.

BERKER INTEGRO

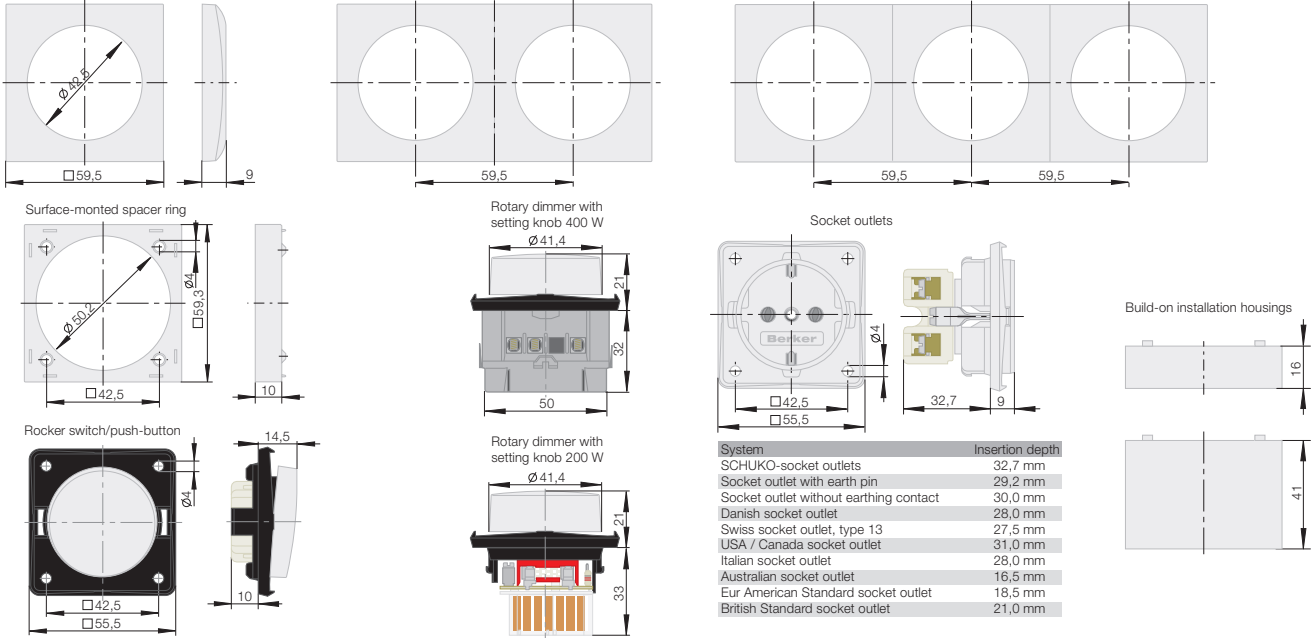

Contact protection boxes BERKER INTEGRO and MOBIL R TWIN

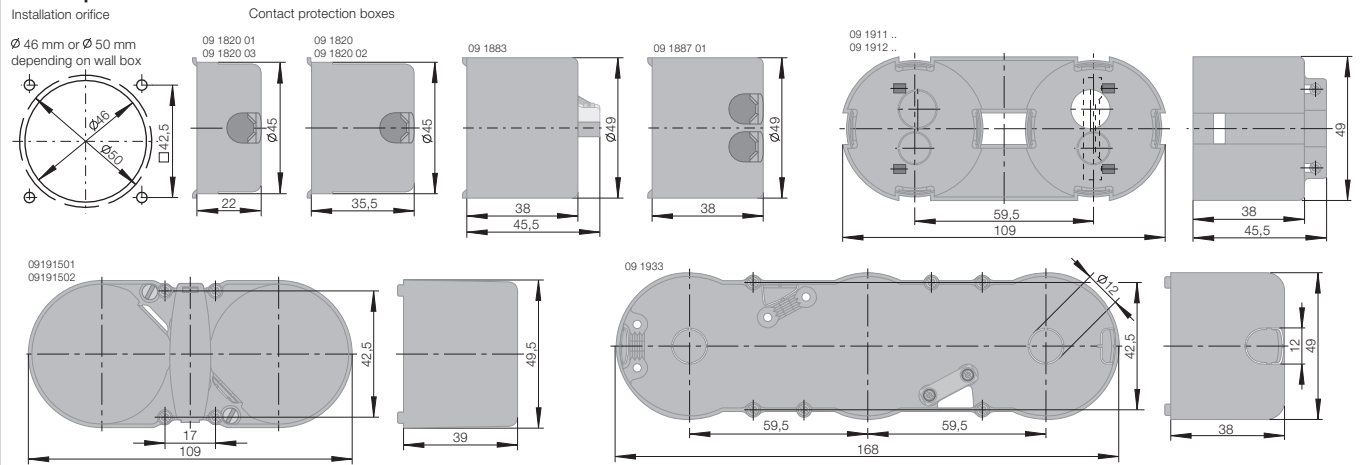

MOBIL R TWIN

